

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

Micro-Klean™ G Series Depth Filter Cartridges

The Micro-Klean G Series filter cartridge is the result of continuing research and engineering efforts by 3M Purification. The Micro-Klean G Series cartridges incorporate state-of-the-art fibre technology and engineering design advances. Produced in a variety of construction materials, this true graded density filter cartridge offers superior performance advantages and economics.

Construction

Micro-Klean G Series cartridges are produced using fibres of controlled diameters and a patented manufacturing process that generates a true graded density depth cartridge. The cartridge provides open areas between the fibres that are progressively smaller and more numerous towards the inside diameter. This graded pore structure traps larger particles on the outer portion of the cartridge while smaller particles are captured as they progress through tortuous passageways in the cartridge wall.

All fibres in this graded density structure are resin impregnated and polymerized to bond each filter into place producing a rigid, self-supporting structure. This rigid structure provides consistent filtration performance under varying pressures and eliminates the need for a centre-supporting core.

Throughout the manufacturing cycle, testing, evaluation, and statistical process control are utilized to monitor Micro-Klean production. Our concern for product consistency ensures that the Micro-Klean G Series cartridge provides the reproducible results that today's critical applications demand.

The right micron rating for each filtration need

The Micro-Klean G Series cartridges are available in a wide range of nominal micron rating to fulfil almost all filtration requirements. From 1 µm to 150 µm nominal, Micro-Klean G Series range is able to perform excellent pre-filtration or final filtration in various industrial market segments. Please refer to the ordering guide located at the end of this brochure to find the right micron rating for your application.

Features & Benefits

Highly efficient particle removal

High dirt-holding capacity thus reducing filtration costs

Ability to withstand high differential pressures (Delta P), hard structure not subject to collapse failure.

Support core eliminated resulting in greater compatibility

Reproducible filtration characteristics

Customized shapes and sizes available upon request



Applications

Paint, varnishes, solvent recovery

Process water

Photographic emulsions

Oxide slurries

Inks & dyes

Plastics

Organic solvents (alcohols, ketones, ethers...)
and hydrocarbons

Magnetic media

Micro-Klean G Series: the right cartridge to fit your application



The right formulation for each application

Micro-Klean G Series technology combines rigid structure and depth filtration in one cartridge to provide optimum performance in life and efficiency. The Micro-Klean G Series range is available in several formulations to fit your applications:

a) Formulation 3

This formulation includes cellulose fibres and a phenolic resin. These cartridges are recommended for strong reducing agents and medium to low pH range solutions. Used for photographic emulsions, oxide slurries, inks, process water, dye, plastics, and solvents.

b) Formulation 8

This formulation includes acrylic fibres and a phenolic resin. General purpose cartridges usable on practically all applications, except potable water and food products. This cartridge has excellent resistance to acids. Can be used on inorganic acids and acid salts with concentration up to 10% at room temperature. They are also highly resistant to alkaline solutions at ambient temperature.

A whole range of standard dimensions

The Micro-Klean G Series manufacturing process allows virtually all kind of configurations to fit in a variety of housings.

a) Double open ended version

Multiple of 9" $\frac{3}{4}$ or 10" are available from 1 module to 4 modules as standard. Double open ended cartridges are supplied without or with flat Volara gasket. This flat gasket (NG version) is more recommended for the tighter micron ratings (i.e. 1 & 5 μ m nominal).

b) Single open ended version

Standard single open ended configurations are now available for retrofitting all kind of existing housings in the market:

- Option B : Code 7 with 226 O-ring.
- Option C : Code 8 with 222 O-ring.
- Option F : Code 3 with 222 O-ring.
- Option R : Spring on top with or without flat gasket.

The B, C, and F end caps are available with the following O-ring material : Silicone, Fluorocarbon, EPR, Nitrile, PTFE encapsulated Silicone, PTFE encapsulated Viton.

c) Customized shapes and special sizes

Special lengths up to 70" are available upon request.

Micro-Klean G Series Filters for Air and Gas applications

Entrained moisture oil and particles in air lines will jam pneumatic tools, clog nozzles and valves render air brakes inoperative and raise all kinds of troubles. The results are : interrupted production, workpiece spoilage, inaccurate gauging and high maintenance costs. Air line contamination exists with the humidity in the air brought in by the compressor, oil from the compressor, and with dirt and rust from the connections and pipes. If the pneumatic circuit is vital for the installation, it is necessary that the air stream be cleared of these contaminants. Removal of all moisture and particles by Micro-Klean G Series cartridges is really positive and complete. Full protection of the circuit is assured when the filter is located as close to the point of use of air and gas as possible. To operate under satisfactory conditions, a circuit should also be equipped with a filter at the compressor. It will remove the excessive amounts of moisture and oil, and extend the life of smaller filters located at the point of use. Please refer to your 3M Purification representative for sizing Micro-Klean G Series in gas applications.

Waste management

Micro-Klean G Series cartridges contain no metal or plastic cores. They can be incinerated, shredded, or crushed after use to reduce overall disposal costs.

Note on housings

3M Purification offers a wide range of standard housings and engineered systems to meet your requirements. For further info on engineering capabilities, please contact us.

Rigid graded density Micro-Klean G Series

Micro-Klean G Series filter cartridges are manufactured using an exclusive proprietary process that achieves a true “graded density” fibre structure with a clean and smooth inside diameter. Each fibre is locked in this arrangement by a thermosetting resin binder to create a rigid structure, eliminating the need for a metal or plastic centre core. Larger particles are trapped in the outer area and finer particles towards the inner area. Figure 1 illustrates how in a graded-density structure the overall effect is to clarify and retain particles by size as they progress through the cartridge.

Micro-Klean G Series : High surface area

Micro-Klean G Series cartridges also feature an optimised groove pattern that increases the surface area by over 65% when compared to smooth cylindrical cartridges (see Figure 2). The grooved surface prevents premature blinding of the outer surface by large particles and allows full utilization of the depth structure. Maximum surface area with a true graded density Micro-Klean G Series can provide 3 times or greater service life than competitive filter cartridges.

Reproducible cost effective filtration

Micro-Klean G Series is manufactured to rigid specifications and subjected to stringent process and quality controls to ensure consistency in filtration performance and ultimately, end-user process consistency - run after manufacturing run.

Micro-Klean G Series specifications

Materials of construction				
MK Formulation	Nominal Rating (µm)	Available grades	Fibres	Resin
3	3	A3	Cellulose/Glass	Phenolic
	5	B3	Cellulose	
	25	F3	Cellulose	
	50	L3	Cellulose	
8	1	Y8	Acrylic	Phenolic
	3	A8	Acrylic	
	5	B8	Acrylic	
	10	C8	Acrylic	
	25	F8	Acrylic	
	50	L8	Acrylic	
	75	Q8	Acrylic	
	100	V8	Acrylic/Rayon	
	125	W8	Acrylic/Rayon	
	150	X8	Acrylic/Rayon	

Operating parameters

- Maximum operating temperature
 - * Standard: 120 °C - Formulation 3 and 8
 - * With polyethylene gasket: 93 °C
 - * With polypropylene bonds and end modifications: 82 °C
- Maximum differential pressure: 4,8 bar @ 82 °C
- Recommended change-out differential pressure: 2,4 bar

Dimensions (nominal)

- Inside diameter: 26,9 mm (1 1/16”) - Outside diameter: 65,9 mm (2 19/32”)
- Cartridge length: from 248 to 1016 mm (9 ¾” through 40”)
- Special length available on request.

Micro-Klean G Series: rigid, graded density cartridge

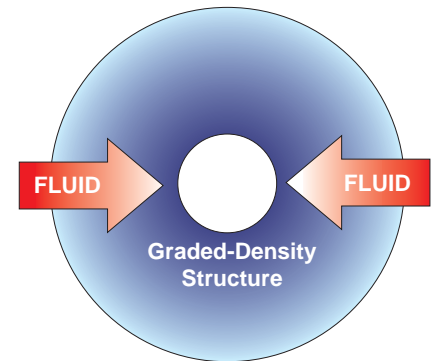


Figure 1: Graded density structure

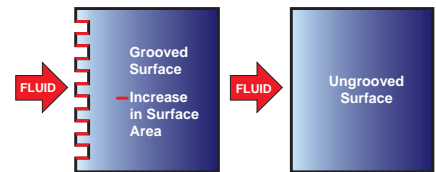


Figure 2 : Surface area comparison

Flow rate : pressure drop data			
Nominal Rating	Grade	Specific ΔP, 10” Cartridge (mbar/lpm)	Max. Aqueous Flow Rate/10” (lpm)
1 µm	Y8	5.93	18.9
3 µm	A8	3.71	18.9
5 µm	B8	2.32	18.9
10 µm	C8	1.3	18.9
25 µm	F8	0.65	22.7
50 µm	L8	0.41	22.7
75 µm	Q8	0.26	22.7
100 µm	V8	0.17	30.3
125 µm	W8	0.07	30.3
150 µm	X8	0.06	30.3
3 µm	A3	2.78	18.9
5 µm	B3	1.48	18.9
25 µm	F3	1.19	22.7
50 µm	L3	0.72	22.7

Micro-Klean G Series Ordering Guide

Standard Products:

Range	Finishing	Cartridge Length	Nominal Micron Rating	Formulation *	DOE or SOE version	Gasket material
MK	G = Grooved	DOE 78 = 9 ¾" 80 = 10"	Y = 1 µm A = 3 µm B = 5 µm C = 10 µm F = 25 µm L = 50 µm Q = 75 µm V = 100 µm W = 125 µm X = 150 µm	3 = cellulose fibre & phenolic resin 8 = acrylic fibre & phenolic resin	DOE length Module " " = 9 ¾" or 10" 2 = 19 ½" or 20" 3 = 29 ¼" or 30" 4 = 39" or 40"	" " = no gasket NG = with flat Polyethylene Gasket
		SOE 10 = 10" 20 = 20" 30 = 30" 40 = 40"			SOE end cap B = Code 7 Pall (226 O-ring) C = Code 8 Pall (222 O-ring) F = Code 3 Pall (222 O-ring)	O-ring material A = Silicone B = Fluorocarbon C = EPR D = Nitrile K = PTFE encapsulated viton X = PTFE encapsulated silicone
		R = Spring on top version			N = no gasket G = with flat Polyethylene Gasket	

* Remark on available grades: Formulation 3: A3, B3, F3, L3 Formulation 8: all grades available
- Cartridges are packed in partitioned boxes and branded with the micron rating and formulation.

Important Notice

3M Purification MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Since a variety of factors can affect the use and performance of a 3M Purification product in a particular application, some of which are uniquely within the user's knowledge and control, user is responsible for determining whether or not the 3M Purification product is fit for a particular purpose and suitable for user's method of application.

Limitation of Remedies and Liability

If the 3M Purification product is proved to be defective, THE EXCLUSIVE REMEDY, AT 3M Purification'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OR TO REPAIR OR REPLACE THE DEFECTIVE PRODUCT. 3M Purification shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including, but not limited to, contract, negligence, warranty or strict liability.

WARRANTY

Seller warrants its equipment against defects in workmanship and material for a period of 12 months from date of shipment from the factory under normal use and service and otherwise when such equipment is used in accordance with instructions furnished by Seller and for purposes disclosed in writing at the time of purchase, if any. Any unauthorised alteration or modification of the equipment by Buyer will void this warranty. Seller's liability under this warranty shall be limited to the replacement or repair, F.O.B., point of manufacture, of any defective equipment or part which, having been returned to the factory, transportation charges prepaid, has been inspected and determined by Seller to be defective. THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EITHER EXPRESSED OR IMPLIED, AS TO DESCRIPTION, QUALITY, MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE OR USE, OR ANY OTHER MATTER. Under no circumstances shall Seller be liable to Buyer or any third party for any loss of profits or other direct or indirect costs, expenses, losses or consequential damages arising out of or as a result of any defects in or failure of its products or any part or parts thereof or arising out of or as a result of parts or components incorporated in Seller's equipment but not supplied by the Seller.

3M and Micro-Klean are trademarks of 3M used under licence.



LENNTECH

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289