


WATER

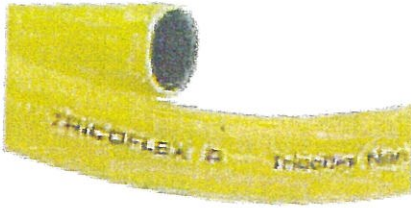

- 1 2 Yellow PVC covering (double layer for Ø 19)
- 3 Woven fibre reinforcement
- 4 5 Smooth black two-layer innertube

**APPLICATIONS**

- Automatic sprinkler installations in greenhouses (mounted on motorized carts)
- Irrigation:
  - water transfer and supply
  - main supply of micro-irrigation networks

**SECTORS OF ACTIVITY**

- Farms
- Horticulture
- Water supply in industry and on construction sites and road works



Marking: TRICOFLEX R Tricoflex Non Torsion Technology [batch number]

**CONNECTORS**

Connectors with band, screw or 'O' type clamps.

**CHEMICAL RESISTANCE**

See table pages 102 to 105 column A.

*COMM. 1.18.189.04  
CARTIERA FORNACI  
ml. 50*

**ADVANTAGES**

The multi-layer design ensures that Tricoflex R is both highly flexible for easy handling and has an excellent resistance to repeated bending, crushing and tensile stress.

A greatly resistant woven fiber and modified materials compared to Tricoflex make Tricoflex R a product particularly well suited to gantry sprinkler equipment in greenhouses, with increased resistance to tensile forces. In addition, the inner surface is extremely smooth, thereby maintaining an even flow.

Especially thick and made of high quality materials, Tricoflex R offers remarkable aging resistance with exceptional preservation of flexibility.

Its exterior yellow PVC covering gives it good protection against abrasion and UV.

						Yellow	
Ø inches	Ø inches	G inches	G inches	PS	PS	164 ft	328 ft
0.75	1.00	0.13	348	116	9.8	116568	116542
0.80	1.25	0.15	348	116	12.0	018871	018891